Portland Office of Transportation
Work Order Diagram

BOM Priority:
Requested Priority:

Location:

Completion Date:

Work Order #: 0167187

Issued by: Batson,Scott M. | **Office:** 35422 | **Cell:** | **Pager:**

Task	Side	Street	Dir	Cross Street	Measured From
A	CENTER	MLK, JR. BLVD	N	NE GOING, E LEG	N CURB
B	CENTER	MLK, JR. BLVD	N	NE GOING, E LEG	N CURB
C	CENTER	MLK, JR. BLVD	S	NE GOING, E LEG	S CURB
D	W	MLK, JR. BLVD	N	NE GOING, WEST LEG	N CURB

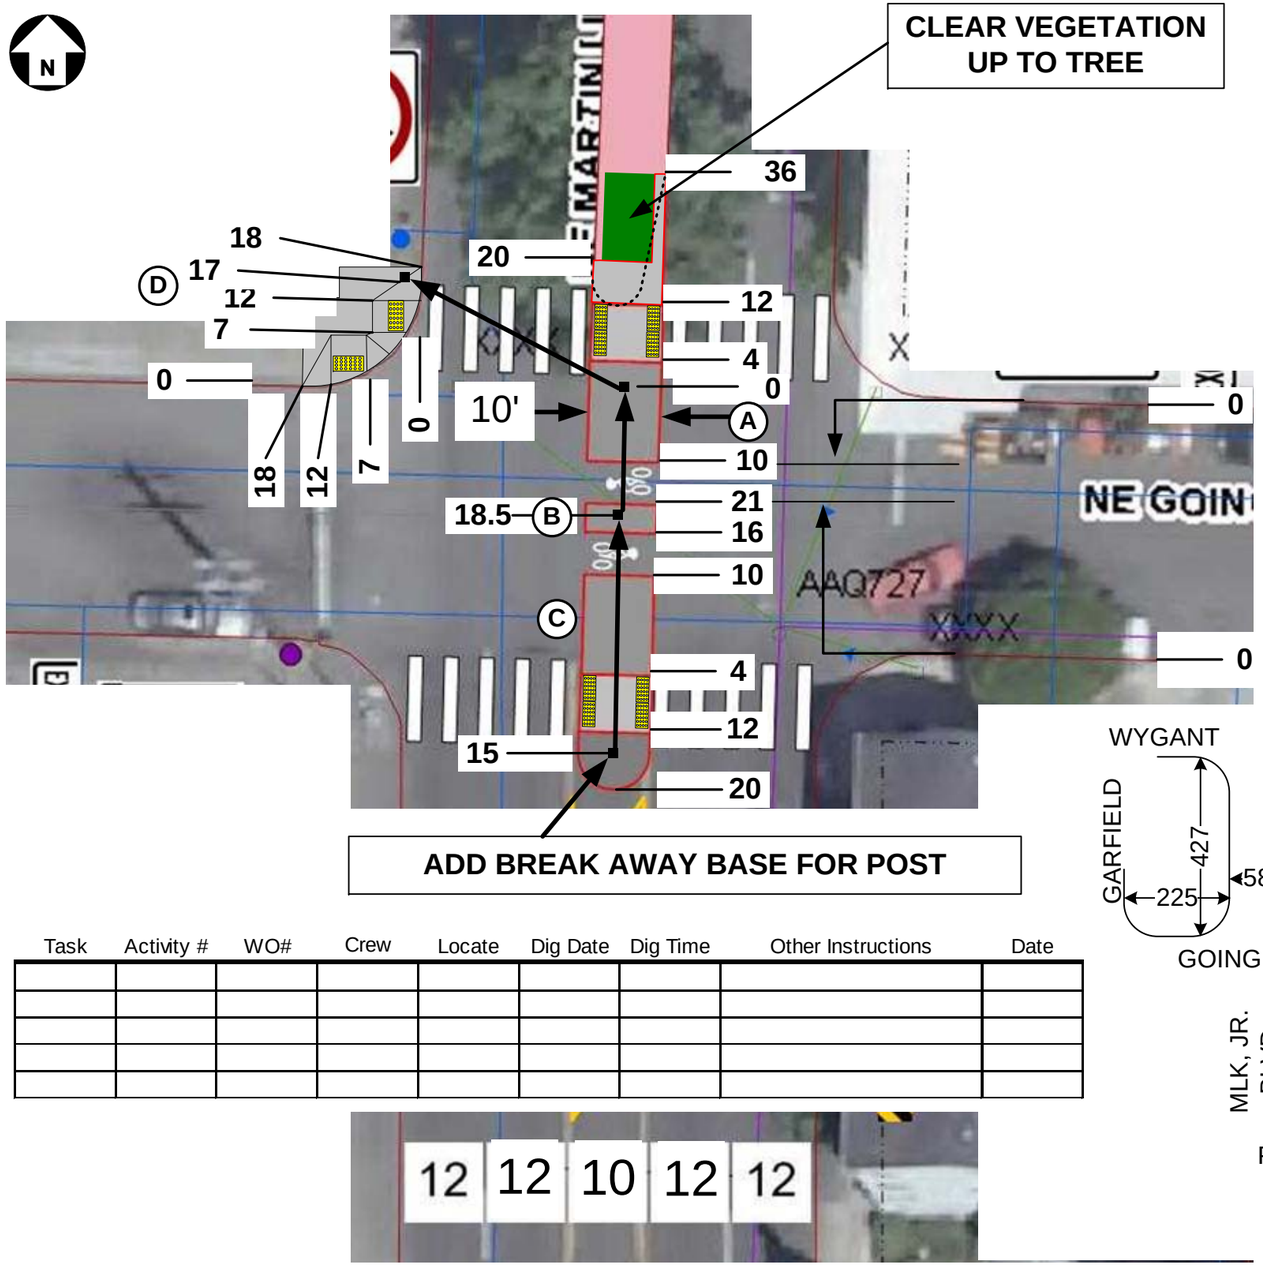

A. AT 10 FT SOUTH TO 36 FT NORTH CONSTRUCT MEDIAN REFUGE ISLAND EXTENSION OF EX. MEDIAN PER PLAN, FIELD MARKINGS AND NOTES WITH PEDESTRIAN AREA. ADD ADA SURFACE TO PEDESTRIAN AREA AS SHOWN. INCLUDE BREAK AWAY BASE FOR POST.

B. AT 16 FT NORTH TO 21 FT NORTH CONSTRUCT MEDIAN ISLAND PER PLAN, FIELD MARKINGS AND NOTES. INCLUDE BREAK AWAY BASE FOR POST.

C. AT 10 FT NORTH TO 20 FT SOUTH CONSTRUCT MEDIAN REFUGE ISLAND PER PLAN, FIELD MARKINGS AND NOTES WITH PEDESTRIAN AREA. ADD ADA SURFACE TO PEDESTRIAN AREA AS SHOWN. INCLUDE BREAK AWAY BASE FOR POST.

CONSTRUCTION NOTES:
1. SAWCUT ASPHALT FOR PED AREA WITH OVERLAP FOR RAISED SECTION AS NEEDED.
2. EXCAVATE A MINIMUM OF 6 INCHES.
3. FILL PED AREA WITH CONCRETE
4. INSTALL ADA SURFACES AS NEEDED.
5. DOWELL RAISED CONCRETE ISLANDS INTO STREET SURFACE PER ODOT STD PLAN RD 705 C WITH 6 INCH CURB.

D. AT 0 FT TO 18 FT NORTH RECONSTRUCT CORNER WITH DUAL CURB RAMPS AND ADA SURFACES. INCLUDE BREAK AWAY BASE FOR POST.

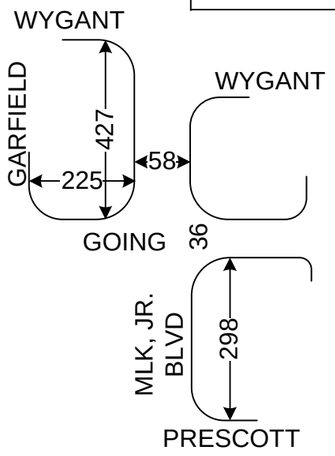

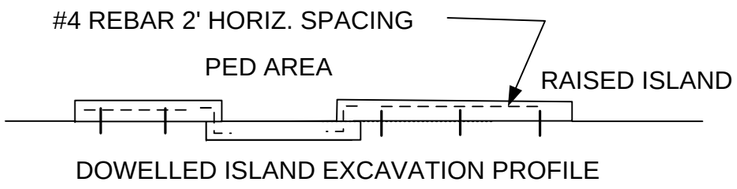

DOWELLED ISLAND EXCAVATION PROFILE

Task	Activity #	WO#	Crew	Locate	Dig Date	Dig Time	Other Instructions	Date

Paving List Conflict Review (Reviewed Paving List and determined there were no conflicts with this work order).

Reviewed BY: **NAME** Date list reviewed: **MM/DD/YY**

BOM Install Notes:_____